

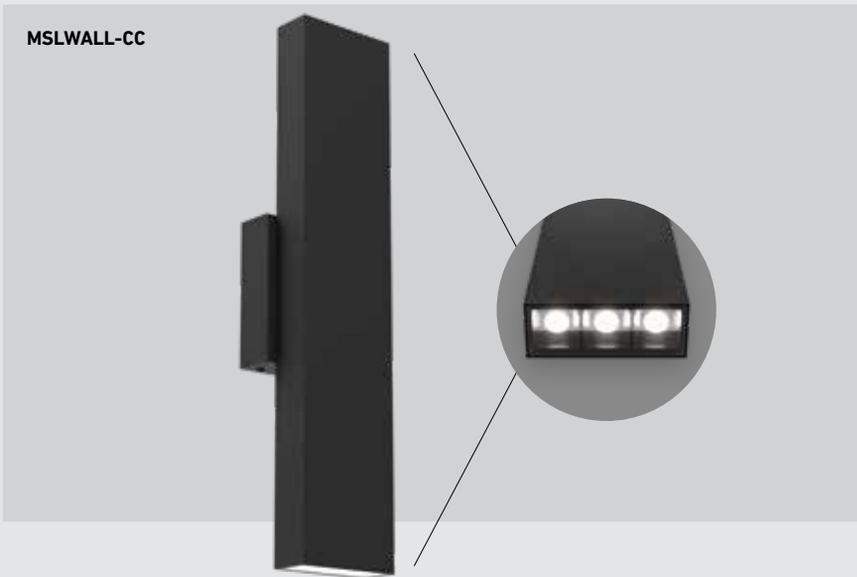


UPGRADE

PINPOINT

The Pinpoint series, with its glossy piano-black reflector, delivers contemporary style and functional illumination for a wide range of applications.

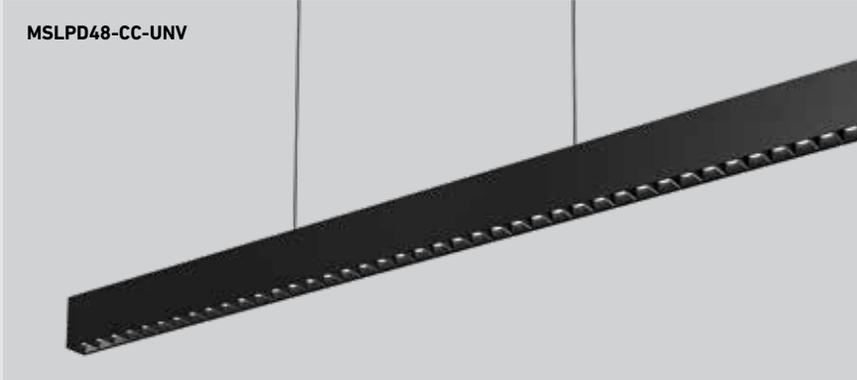

COLOR SELECT



DRY**

**T24
JA8**
CERTIFIED**



GRAVITY GLIDE*



UNIVERSAL DRIVER**



WET†

ADA
COMPLIANT†




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
MSLPD48-CC-UNV*	48"	40 W	2700 lm	90	2700, 3000, 3500, 4000, 5000 K	120 / 277 / 347V Triac, ELV, and 0-10V dimming
MSLPD72-CC-UNV	72"	60 W	3200 lm			
MSLWALL-CC**	18"	15 W	760 lm			120 V

*Model MSLPD48-CC-UNV


**Models MSLPD48-CC-UNV, MSLPD72-CC-UNV

†Model MSLWALL-CC


MSLPD48-CC-UNV

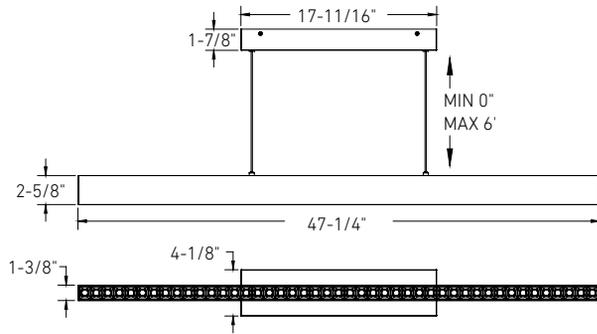

MSLPD72-CC-UNV

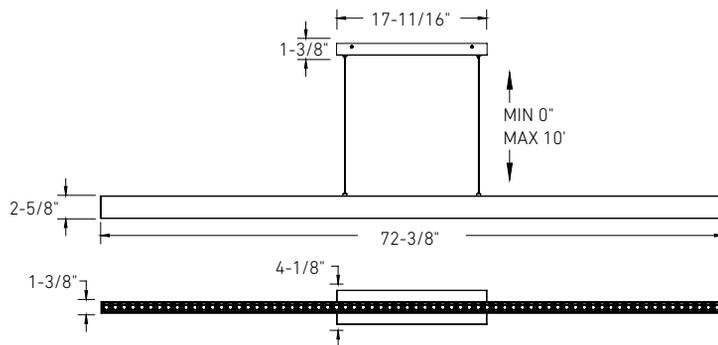

MSLWALL-CC



Specifications

Universal voltage driver supports 120V, 277V, or 347V input with both TRIAC and 0–10V dimming (models MSLPD48-CC-UNV and MSLPD72-CC-UNV)

Adjustable height up to 6 feet with Gravity Glide (model MSLPD48-CC-UNV)

Adjustable height up to 10 feet (model MSLPD72-CC-UNV)

Aluminum housing

Switch-selectable CCT

30° beam angle

Integrated dimmable driver

Canopy mount on 4" octagon junction box

5-year warranty

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

More from this family



MSL1
pg. 38



MSL2
pg. 38



MSL4
pg. 38



MSL5
pg. 38



MSL5G
pg. 38



MSL10
pg. 38



MSL10G
pg. 38

Finish

● **BK** Black